


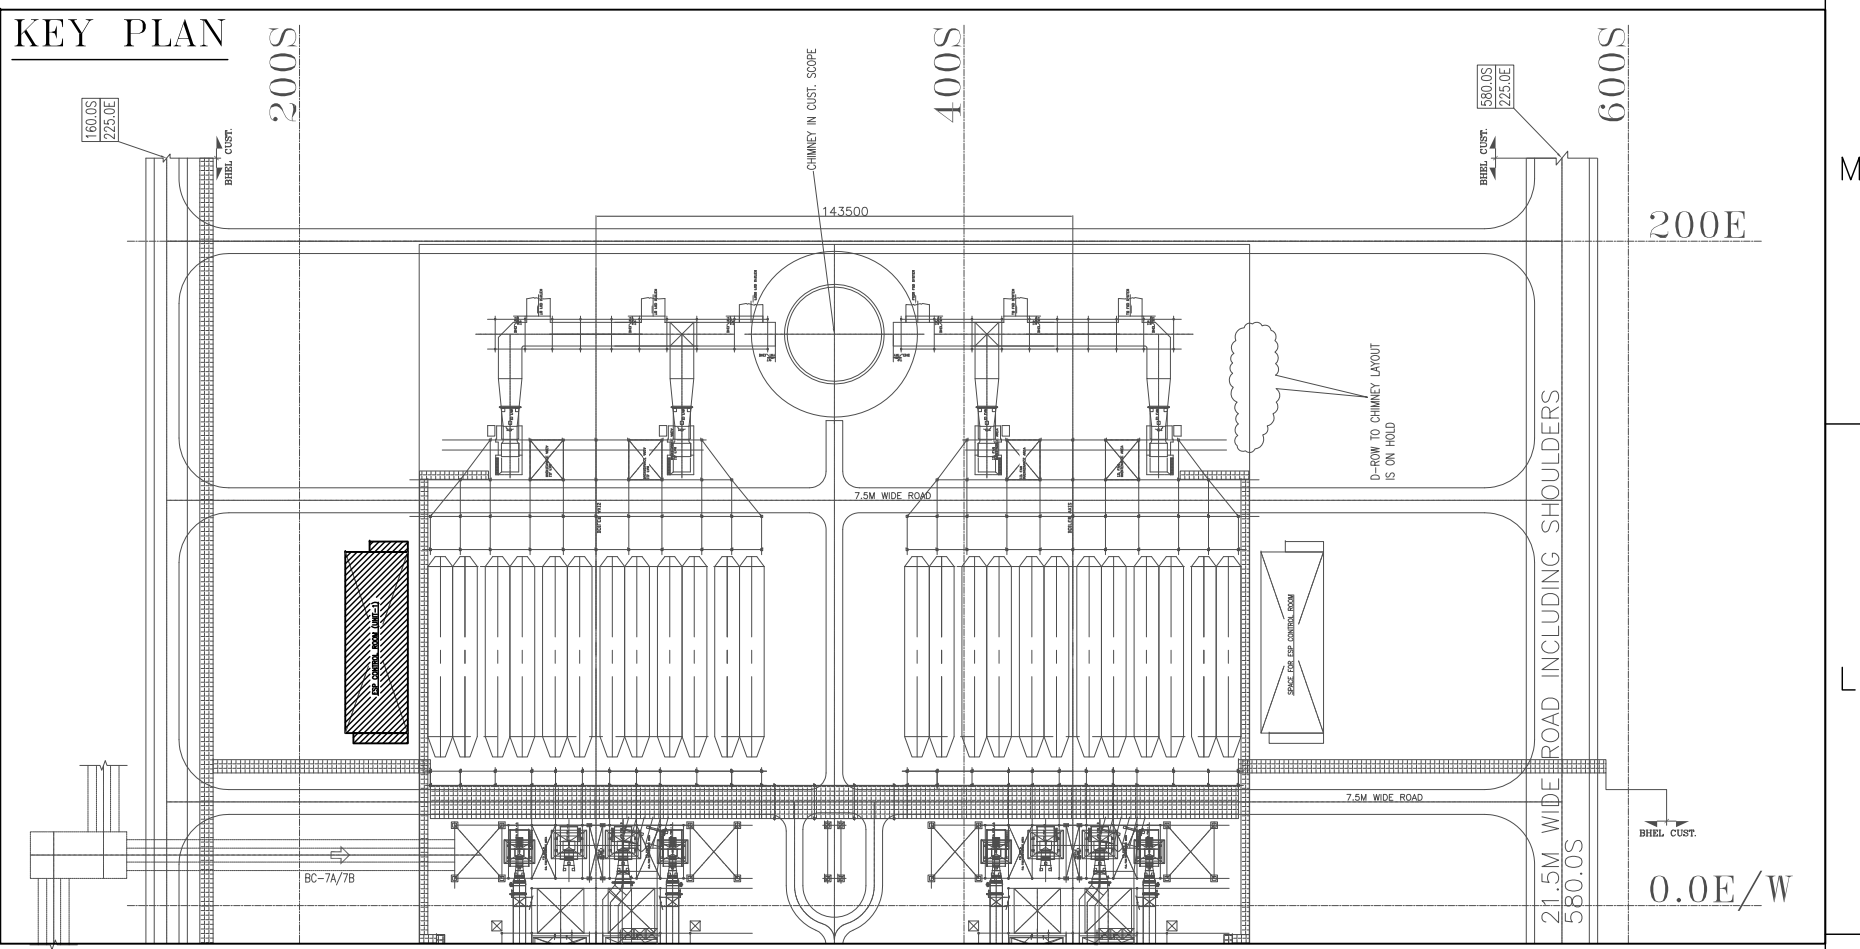

NOTES: -


1. ALL DIMENSIONS ARE IN MM & ELEVATIONS IN METERS UNLESS STATED OTHERWISE.
2. ALL ELEVATIONS ARE, WITH RESPECT TO MAIN POWER HOUSE BUILDING GROUND FLOOR LEVEL AS ELVD 0.00 M. WITH CORRESPONDING RL. 5.50 M.
3. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH CONTRACT TERMS AND CONDITIONS, SPECIFICATION AND SCHEDULE OF ITEMS.
4. FOR GENERAL NOTES REFER DWG. NO. PE-DG-425-600-C001
5. ALUMINIUM GRILLS SHALL BE PROVIDED FOR ALL WINDOWS IN GROUND FLOOR.
6. FOR INTERNAL WALL 12MM THK CEMENT MORTAR PLASTERING SHALL BE PROVIDED
7. FOR EXTERNAL OF ALL WALLS 20MM THK CEMENT MORTAR PLASTERING WITH 1ST COAT 12MM THK IN CM 1:3 AND 2ND COAT OF 800 THK IN CM 1:2 SAND FACED.
8. FOR CEILING 6MM THK (10CMET:3SAND) CEMENT MORTAR PLASTERING SHALL BE PROVIDED.

REFERENCE DRGS.:—

1. PE-DG-425-100-E008 - ELECTRICAL EQUIPMENT & CABLING LAYOUT IN ESP CONTROL ROOM BUILDING UNIT- 1 & 2.

LEGENDS.: –

	- BRICK WALL	RWP	- RAIN WATER PIPE
EL	- ELEVATION	TYP	- TYPICAL
FFL	- FINISHED FLOOR LEVEL	TOC	- TOP OF CONCRETE
FGL	- FINISHED GROUND LEVEL	TOP	- TOP OF PARAPET
BOL	- BOTTOM OF LINTEL	UNO	- UNLESS NOTED OTHERWISE
BOC	- BOTTOM OF CONCRETE	R.S.	- ROLLING SHUTTER
		 EL(+)X.XXX	- LEVEL TAG

CUSTOMER		 TAMILNADU GENERATION AND DISTRIBUTION CORPORATION LIMITED	
CUSTOMER'S CONSULTANT		 TRACTEBEL ENGINEERING PVT. LTD.	
OB NO. 425		2X800MW UPPUR STPP (UNIT#1&2)	
STATUS CONTRACT		IN RAMANATHAPURAM DISTRICT, TAMILNADU	
DISTRIBUTION			
TO			
BY			
SV	DATE	ALTD	CHD
APPD			
		BHARAT HEAVY ELECTRICALS LTD POWER SECTOR PROJECT ENGINEERING NOIDA	
TITLE		DEPT. _____ NAME _____ SIGN _____ DATE _____ DRN _____ SV _____ SA 18.10.2017 CHD _____ SW _____ SA 18.10.2017 APPD _____ SA 18.10.2017	
ESP CONTROL BUILDING		DRAWING NO.	
ARCHITECTURAL ELEVATIONS		PE-DG-425-619-C004	
DEPT. _____ SCALE: _____ SIGN _____ DATE _____		SHEET 1 OF 2 REV. 0	
		FORMAT SIZE A0	

